




- Maximum circular deviation between K and d1 ≤ 0.003 mm.
- Balanced according to ISO 1940-1 up to 15,000 rpm.
- We have latest methods for dynamic balancing up to 50,000 rpm.
- Coolant tube to be ordered separately.

Taper (D)	Length (L)	M Thread (G)	Part Number
HSK-A 40	50	6	681.00314571201
HSK-A 40	50	8	681.00314571202
HSK-A 50	55	6	681.00314571301
HSK-A 50	55	8	681.00314571302
HSK-A 50	55	10	681.00314571303
HSK-A 50	55	6	681.00314571401
HSK-A 63	55	8	681.00314571402
HSK-A 63	55	10	681.00314571403
HSK-A 63	55	12	681.00314571404
HSK-A 63	55	16	681.00314571405
HSK-A 100	95	8	681.00314572602
HSK-A 100	95	10	681.00314572603
HSK-A 100	85	12	681.00314572604
HSK-A 100	85	16	681.00314572605
HSK-A 40	100	8	681.00314573201
HSK-A 40	100	8	681.00314573202
HSK-A 50	105	6	681.00314573301
HSK-A 50	105	8	681.00314573302
HSK-A 50	105	10	681.00314573303
HSK-A 50	105	6	681.00314573401

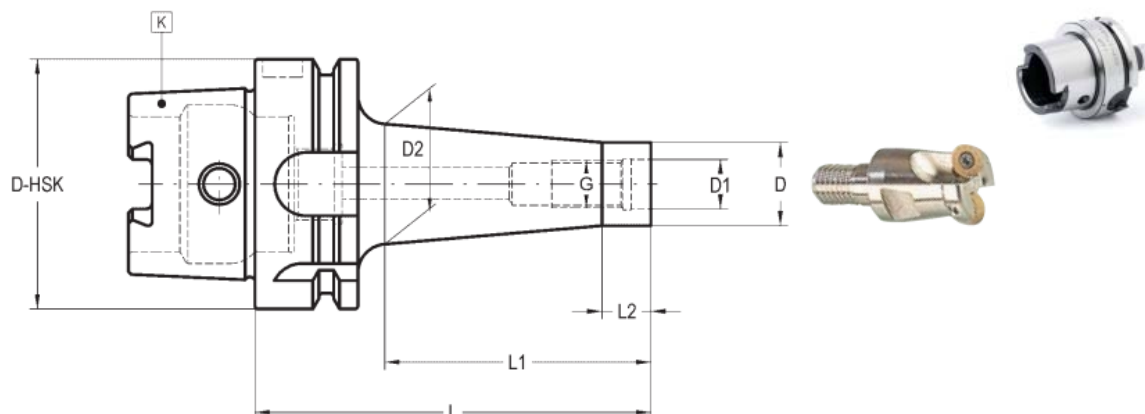


Taper (D)	Length (L)	M Thread (G)	Part Number
HSK-A 63	105	8	681.00314573402
HSK-A 63	105	10	681.00314573403
HSK-A 63	105	12	681.00314573404
HSK-A 63	105	16	681.00314573405
HSK-A 63	130	10	681.00314574403
HSK-A 63	130	12	681.00314574404
HSK-A 100	145	8	681.00314574602
HSK-A 100	145	10	681.00314574603
HSK-A 100	135	12	681.00314574604
HSK-A 100	135	16	681.00314574605
HSK-A 100	195	8	681.00314576602
HSK-A 100	195	10	681.00314576603
HSK-A 100	195	12	681.00314576604
HSK-A 100	195	16	681.00314576605

Available for HSK-A 40, 50, 63, 100

TAC Rockford Product Line

Machine Tool Gauges, Tool Changer Alignment, Runout Test Arbors, Workholding Systems, Tool Holders, Adapters and Extensions, Tool Holder Blanks, Machine Tool Accessories, Coolant Tubes and Gauges, Heat Shrink Systems, Rapid Prototyping


Tool Holders



Gauges



Accessories



Rapid Prototyping

