


For tools with Plain cylindrical straight shank

Rev. 12-1101 Page 1 of 1
Uncontrolled Document

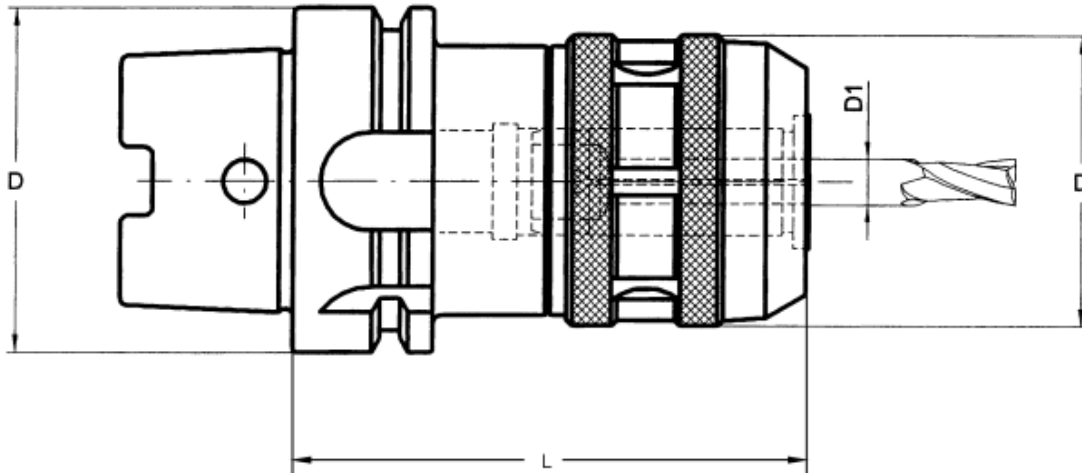

- Maximum circular deviation between outer taper and collet housing ≤ 0.003 mm.
- In order to achieve best results we recommend to use cylindrical tools with h6 tolerance. When tool shank diameter is 'd1 max.', there is no need of any collet.
- Balanced according to ISO 1940-1 up to 10,000 rpm. We have latest methods for dynamic balancing up to 50,000 rpm.
- Coolant tube to be ordered separately.

Taper (D)	Length (L)	D1	Part Number
HSK-A 63	110	20	681.00414050404
HSK-A 63	130	32	681.00414050406
HSK-A 80	135	32	681.00414050506
HSK-A 100	140	32	681.00414050606

Available for HSK-A 63, 80, 100

TAC Rockford Product Line

Machine Tool Gauges, Tool Changer Alignment, Runout Test Arbors, Workholding Systems, Tool Holders, Adapters and Extensions, Tool Holder Blanks, Machine Tool Accessories, Coolant Tubes and Gauges, Heat Shrink Systems, Rapid Prototyping


Tool Holders



Gauges



Accessories



Rapid Prototyping

