


For tools with cylindrical straight shank DIN 1835-A

Rev. 12-1101 Page 1 of 1
Uncontrolled Document

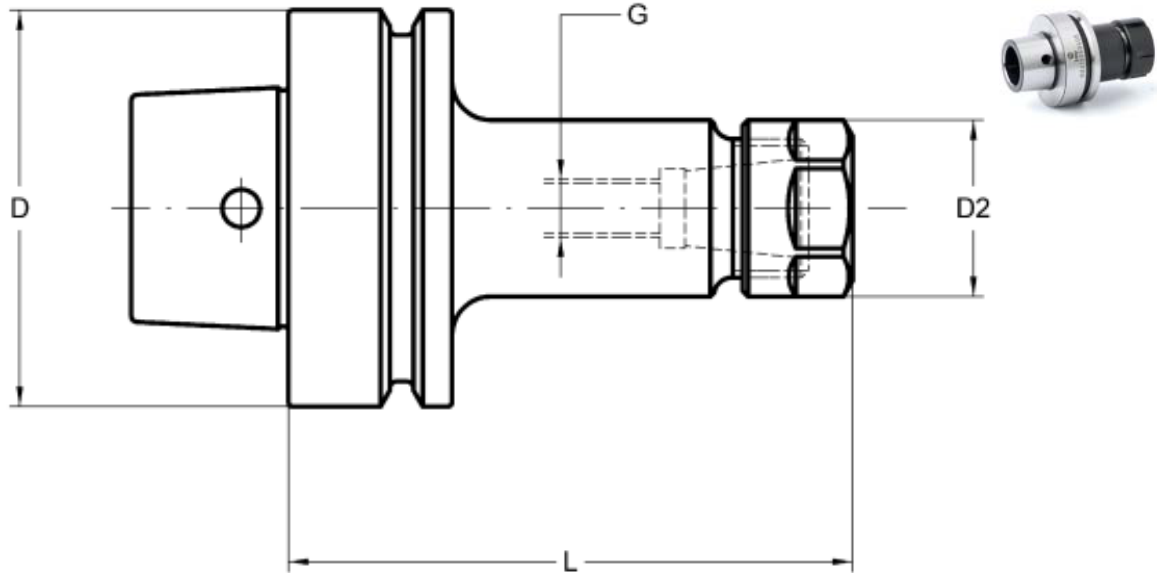

- Maximum circular deviation between outer taper and collet housing ≤ 0.003 mm.
- Balanced according to ISO 1940-1 up to 10,000 rpm.
- We have latest methods for dynamic balancing up to 50,000 rpm.

Taper (D)	Length (L)	Collet Size	D2	G	Part Number
HSK-F 63	80	ER 16	28	M-10	681.00419060403
HSK-F 63	80	ER 25	42	M-10	681.00419060405
HSK-F 63	100	ER 32	50	M-16	681.00419060406

Available for HSK-F 63

TAC Rockford Product Line

Machine Tool Gauges, Tool Changer Alignment, Runout Test Arbors, Workholding Systems, Tool Holders, Adapters and Extensions, Tool Holder Blanks, Machine Tool Accessories, Coolant Tubes and Gauges, Heat Shrink Systems, Rapid Prototyping


Tool Holders



Gauges



Accessories



Rapid Prototyping

