


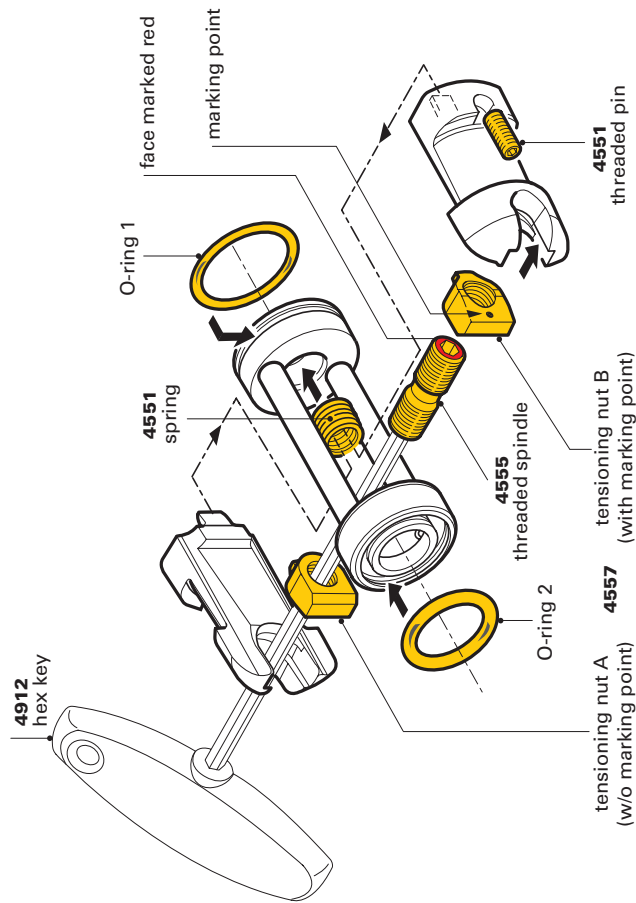

for HSK-C	O-rings 1 Ø/thickness	O-rings 2 Ø/thickness	Guhring no. 4555		Guhring no. 4557		Guhring no. 4551	
			Threaded spindle	Availability	Tensioning nut set	Availability	Spring and threaded pin	Availability
25	11.5 x 1.0	7.0 x 2.0	2,019	•	1,019	•	3,019	•
32	14.0 x 1.5	10.0 x 2.5	2,024	•	1,024	•	3,024	•
40	18.0 x 1.5	12.5 x 2.5	2,030	•	1,030	•	3,030	•
50	22.0 x 1.5	16.0 x 3.0	2,038	•	1,038	•	3,038	•
63	28.0 x 2.0	21.0 x 3.0	2,048	•	1,048	•	3,048	•
80	36.0 x 3.0	25.0 x 4.0	2,060	•	1,060	•	3,060	•
100	45.0 x 3.0	32.0 x 5.0	2,075	•	1,075	•	3,075	•