




The central and coaxial MQL supply with constant internal diameter prevents coolant from consolidating. For a coolant pressure up to 80 bar.

- Complete as shown in illustration
- Installation and operating instructions included

Taper	Length (l ₁)	Ø (d ₁)	d ₂	G	SW1	SWA	Part Number
HSK-C 32	39.5	16.7	3	M10	2.5	3	683.4930.024.000
HSK-C 40	49.5	20.6	4	M12	3	4	683.4930.030.000
HSK-C 50	59	25.5	5	M16	4	5	683.4930.038.000
HSK-C 63	76	33	6	M20	5	6	683.4930.048.000
HSK-C 80	98	41	8	M24	6	8	683.4930.060.000
HSK-C 100	117.5	52	10	M24	8	10	683.4930.075.000

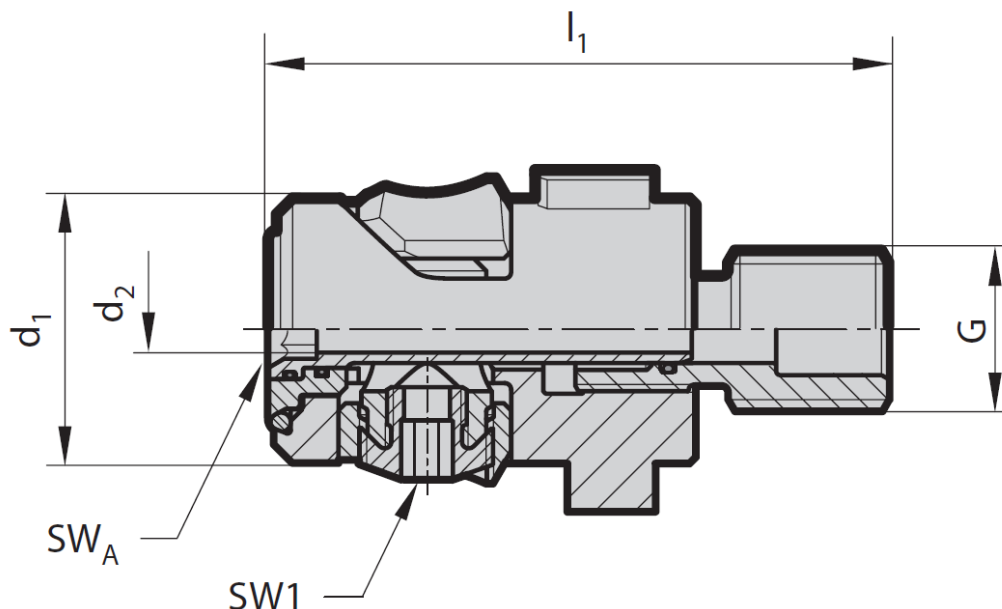

Clamping Cartridge Installation Tools (683.963)

For the installation of 4-point clamping sets, if there are difficulties locking the spindle.

Installation Tool For Taper	Part Number
HSK-C 63	683.4963.048.000
HSK-C 25	683.963.019.000
HSK-C 32	683.963.024.000
HSK-C 40	683.963.030.000
HSK-C 50	683.963.038.000
HSK-C 80	683.963.060.000