




- For a coolant pressure up to 80 bar
- Includes installation and operating instructions

Taper	Length (l1)	Dia. (d1)	G1	G2	SW1	SW2	Part Number
HSK-C 25	34	13.8	M8	M4	2.5	3	683.958.019.000
HSK-C 32	40	16.7	M10	M5	2.5	4	683.958.024.000
HSK-C 40	49	20.6	M12	M6	3.0	5	683.958.030.000
HSK-C 50	59	25.5	M16	M8	4.0	6	683.958.038.000
HSK-C 63	72	33.0	M20	M10	5.0	8	683.958.048.000
HSK-C 80	97	41.0	M24	M12	6.0	10	683.958.060.000

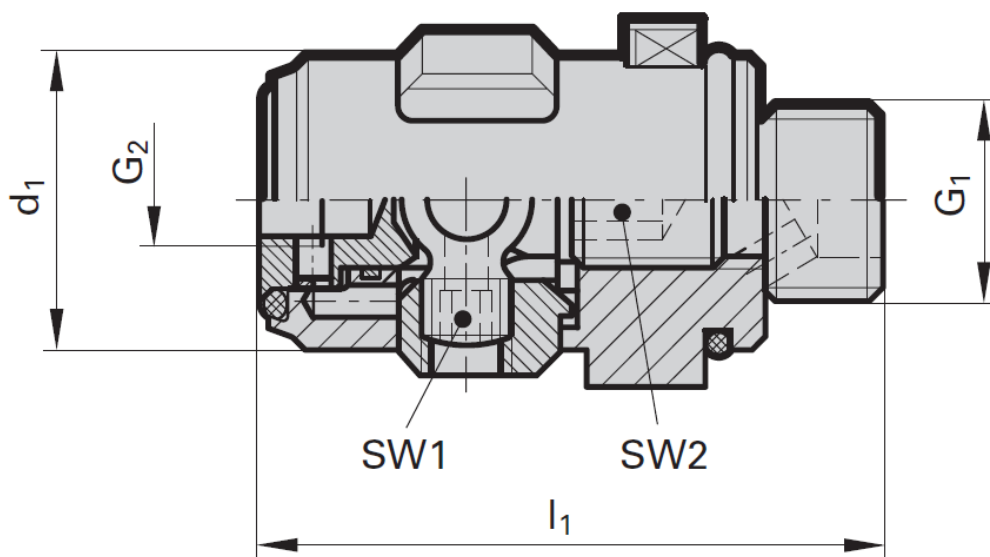

Clamping Cartridge Installation Tools (683.963)

For the installation of 4-point clamping sets, if there are difficulties locking the spindle.

Installation Tool For Taper	Part Number
HSK-C 63	683.4963.048.000
HSK-C 25	683.963.019.000
HSK-C 32	683.963.024.000
HSK-C 40	683.963.030.000
HSK-C 50	683.963.038.000
HSK-C 80	683.963.060.000