


For converting HSK spindles to Coromant Capto (Polygon Sided Cone PSC/PSK) tool taper

Rev. 12-1102 Page 1 of 1
Uncontrolled Document

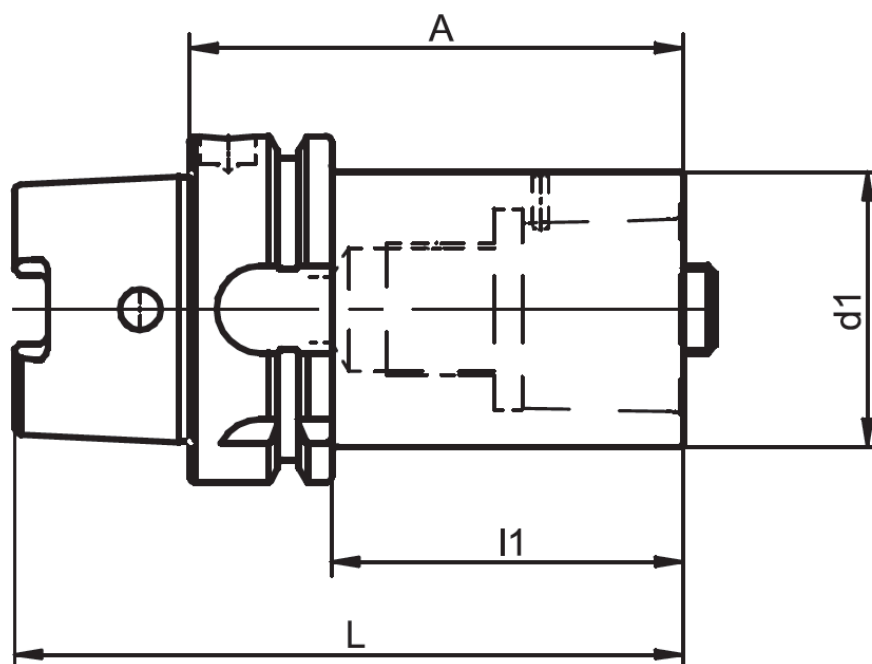

Use

For holding PSK tools ISO 26623-1, d1 = nominal size PSK.

Standard Specification

Clamping screw included.

Note

Other designs and sizes are available on request.

HSK Spindle	Adaption	d1	A	l1	L	Part Number
HSK-A 63	Capto/PSK C3	32	75	49	107	618.363.C03.000
HSK-A 63	Capto/PSK C4	40	80	54	112	618.363.C04.000
HSK-A 63	Capto/PSK C5	50	90	64	122	618.363.C05.000
HSK-A 100	Capto/PSK C3	32	80	51	130	618.390.C03.000
HSK-A 100	Capto/PSK C4	40	90	61	140	618.390.C04.000
HSK-A 100	Capto/PSK C5	50	100	71	150	618.390.C05.000
HSK-A 100	Capto/PSK C6	63	110	81	160	618.390.C06.000
HSK-A 100	Capto/PSK C8	80	120	91	170	618.390.C08.000